

14R

4413


Toyota LC 150, Mod. 2017

EU-Personenschutzbügel 76 mm mit Querrohr 51 mm
EU-Pedestrian Protection Bar 76 mm with cross pipe 51 mm
Protection avant, homologuée CEE, 76 mm, traverse 51 mm



ASSEMBLY INSTRUCTION

Montageanleitung • Instructions de montage




50 Minuten

article no.:
14R4413 (S) inox
14R5413 black steel

Revision 4: 20.02.2024








M5 (A2):
5,1 Nm
M6 (A2):
8,8 Nm
M6:
10 Nm
M8 (A2):
21,4 Nm
M8:
25 Nm
M12:
87 Nm

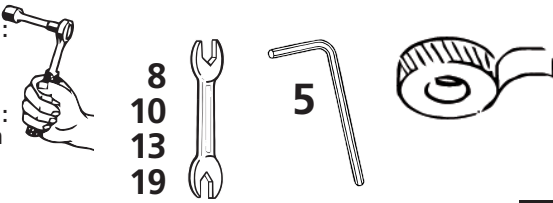

8
10
13
19

mounting kit: 14R9413

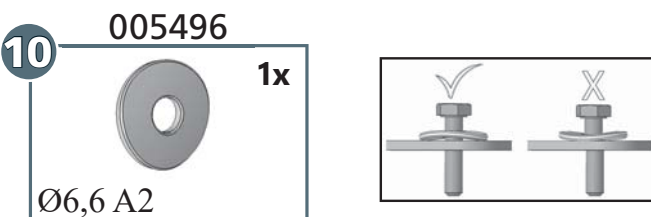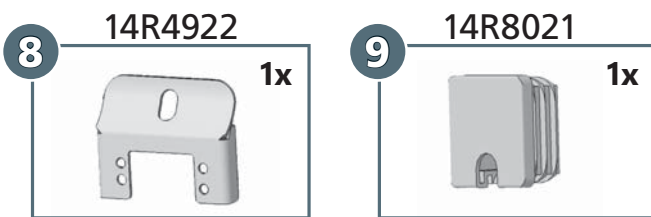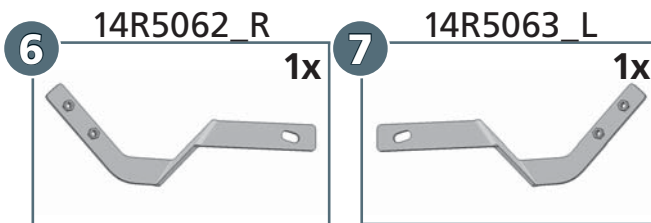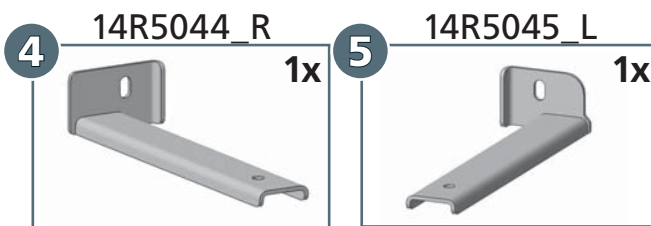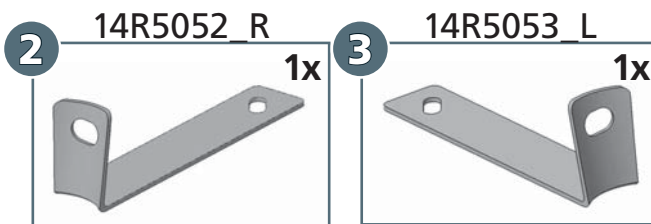

| | | |
|--|--------------------------|----|
| | M8x30; ähnl. ISO 7380 A2 | 4x |
| | M8x25; DIN 933 A2 | 2x |
| | M5x16; DIN 933 A2 | 4x |
| | M6x20; DIN 933 Zn | 2x |
| | M6x25; DIN 933 A2 | 1x |
| | M8x20; DIN 933 Zn | 2x |
| | M12x1,25x30; DIN 961 Zn | 2x |
| | M5; DIN 934 A2 | 4x |
| | Ø 5; DIN 127 A2 | 4x |
| | Ø 6; DIN 127 Zn | 2x |
| | Ø 8; DIN 127 Zn | 2x |
| | Ø 8; DIN 127 A2 | 2x |
| | Ø 12; DIN 127 Zn | 2x |
| | Ø 5,3; DIN 125 A2 | 8x |
| | Ø 6,4; DIN 9021 Zn | 2x |
| | Ø 8,4; DIN 9021 Zn | 2x |
| | Ø 8,4; DIN 9021 A2 | 2x |
| | Ø 13; DIN 9021 Zn | 2x |
| | SW 10 | 1x |
| | SW 13 | 4x |



article no.:
14R4413 (S) inox
14R5413 black steel

Revision 4: 20.02.2024



